

Indian Chieftain Family 2014 and Up

Two Piece Seat (Bolted Together)

Ultimate Seats Installation

Install Kit

Flathead bolt ¼”- 20 x 1-½” long = 1

Nylon flat washer = 1

Button head bolts M8 x 25 mm long = 2

Removal of Stock Seat Set:

1. Remove the quick release passenger backrest (sissy bar).
2. Remove the side covers from both sides.
3. Remove the bolts on each side of the driver seat.
4. Remove the rear fender bolt from the passenger seat.
5. Slide seat set back and up to remove.

BEFORE INSTALLING YOUR NEW SEAT, PLEASE READ!

The OEM stock Indian® seat has two holes in the front of it that hook onto two prongs behind the gas tank. Your new Ultimate Seat instead uses 1 front locator bracket (Figure 1). That slides up into the channel at the back of the gas tank (Figure 2). It is not necessary to remove the prongs the stock seat mounts to.

Install Your New Seat Set (Rider and Passenger Seat):

Installation Note 1: Remove the OEM driver backrest bracket if it is installed on your bike.

Installation Note 2: Remove the passenger strap bracket pictured in Fig. 3.

Installation Note 3: Sissy Bar Luggage Rack If you have the Indian luggage rack that bolts to the passenger backrest (sissy bar), Replace the hex bolts with the 2 button head bolts provided (M8 x 25mm).

Installation Note 4: CAPTAIN ITCH HEAT SHIELD – If you have a Captain Itch Heat shield, please refer to our installation kit / installation instructions for that.

1. Bolt the Ultimate passenger seat to the driver seat using the supplied flat head bolt ¼”-20 x 1½” long. Note the supplied nylon washer installs between the passenger bracket and the driver seat base pan (Figure 4)
2. **HEATED SEATS** - If your stock seat is a 2-piece driver/passenger seat, then plug the Ultimate Seat into the OEM power supply plug. If your stock seat is a 1-piece driver/passenger seat, you will need to locate the plug that is wrapped in cloth electrical tape in Figure 5 and remove it from the tape. It will be a bump on the electrical harness on the clutch side of the bike near the ECU. Then, use the supplied adapter plug to connect your seat to the bike.
3. Install your Ultimate seat set now, make sure you have the front locating bracket on the seat nose located properly in the bike frame under the tank and reinstall the stock screws in the front seat and rear passenger bracket.
4. Reinstall your side covers.

Remove/Install sissy bar pad (optional)

Reinstall your passenger backrest (sissy bar)

Remove the 2 screws holding the stock pad and remove, store the pad.

Install the Ultimate pad using the 2 stock bolts.

Solo Seat Install

The Ultimate Solo installs exactly like stock with the side bolts.

If you have the Indian solo luggage rack it bolts to our seat with two 3/8” x 16 x 1” button head bolts. These bolts are already installed in the seat base pan.

Figure 1



Figure 2

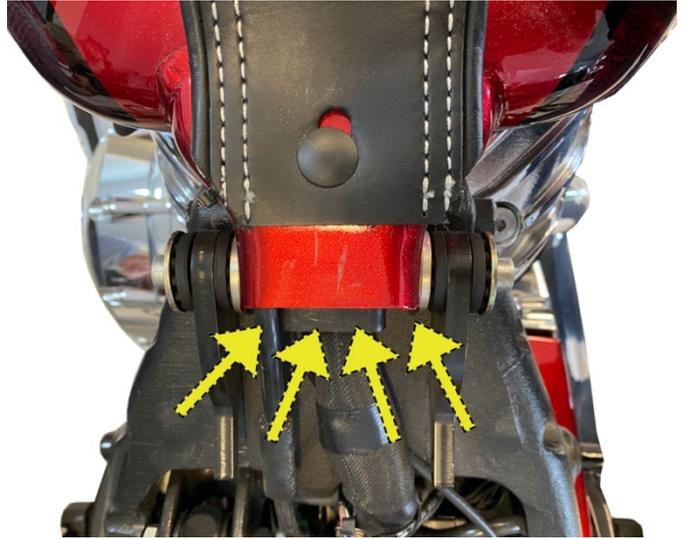


Figure 3



Figure 4



Figure 5



Questions?
877-672-0288
des@ultimateseats.com
www.ultimateseats.com

07/3/2023