

## **Indian Roadmaster 2015 and Up** **Two Piece Seat (Bolted Together)** **Ultimate Seats Installation**

### **Removal of Stock Seat Set:**

1. Remove the side covers on both sides.
2. Unplug the electrical harness that comes out of the back of your stock seat and plugs into trunk.
3. Remove the quick release Trunk from the bike.
4. Remove the bolts on each side of the driver seat.
5. Remove the rear fender bolt from the passenger seat.
6. Slide seat set back and up to remove.
7. Unplug factory heat plug.
8. Remove the trunk electrical harness from the stock seat and install it onto the Ultimate Seat  
(see install note 5)

### **Install Your New Seat Set:**

**Installation Note 1:** If you have a **Captain Itch Heat Shield**, it will need to be modified to fit with your Ultimate Seat. If you indicated with your order that you use a Captain Itch Heat Shield, a template to cut the shield was supplied with your new Ultimate Seat as well as 2 button head bolts (M8 x 35mm) that replace the OEM tank bolts indicated in **Fig 1**.

After the heat shield is modified install it under the seat on the front locator bracket then install the seat with it attached **Fig 2**.

**Installation Note 2:** Remove the OEM driver backrest bracket if it is installed on your bike (4 bolts)

**Installation Note 3:** Remove passenger strap bracket if it installed on your bike.

**Installation Note 4:** If you have the Indian® Concert Audio Kit (Part #2879816) installed, the amp must be relocated from the factory suggested mounting location **Fig 3**.

Bolt the Ultimate passenger seat to the driver seat using the supplied flat head bolt ¼"-20 x 1-1/2" long.

Note the supplied nylon washer installs between the passenger bracket and the driver seat pan.

**Installation note 5:** The trunk electrical harness installs into our passenger seat clamps, leave enough cable out to reach the plug connector for the trunk **Fig 4**.

1. Plug the trunk harness connector back into the outlet you disconnected it from.
2. If you have purchased our heated seat set, then plug the Ultimate Seat into the OEM heat plug socket.
3. Install your Ultimate seat set now, make sure you have the front locating bracket on the seat nose located properly in the bike frame under the tank and reinstall the stock screws in the front seat and rear passenger bracket.
4. Reinstall the quick release trunk onto the bike.
5. Plug the harness into the trunk connector.
6. Reinstall your side covers.

### **Solo Seat Install**

The Ultimate Solo installs exactly like stock with the side bolts.

If you have the Indian luggage rack it bolts to our seat with two 3/8" x 16 x 1" button head bolts (supplied)

**Questions?**

**877-672-0288**

**[des@ultimateseats.com](mailto:des@ultimateseats.com)**  
**[www.ultimateseats.com](http://www.ultimateseats.com)**

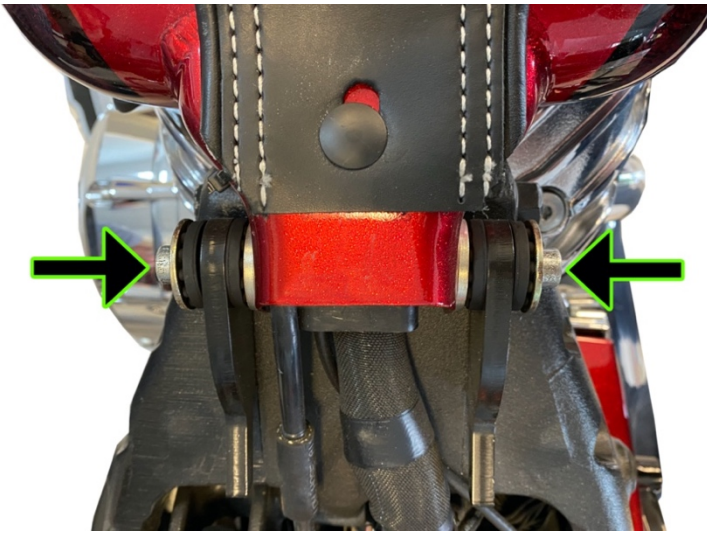


Figure 1

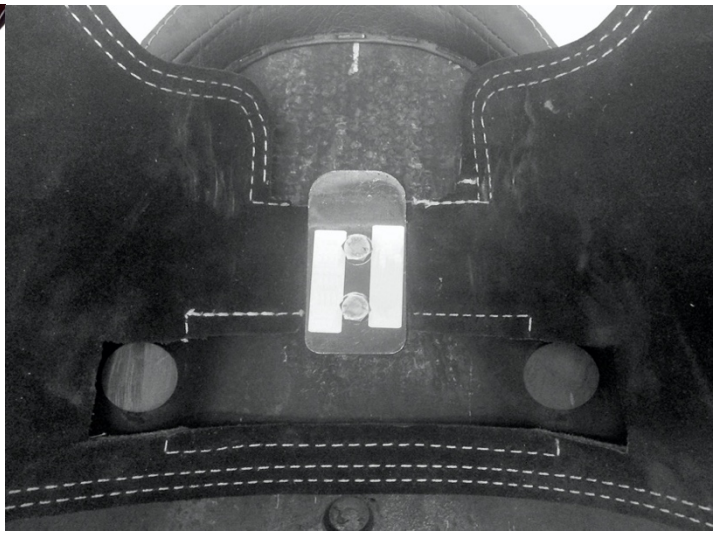


Figure 2



Figure 3



Figure 4